


Instalacja systemu Rocky Linux 9 z nazwaniem odpowiednio VG oraz LV

Po uruchomieniu instalatora wybieramy odpowiedni język:

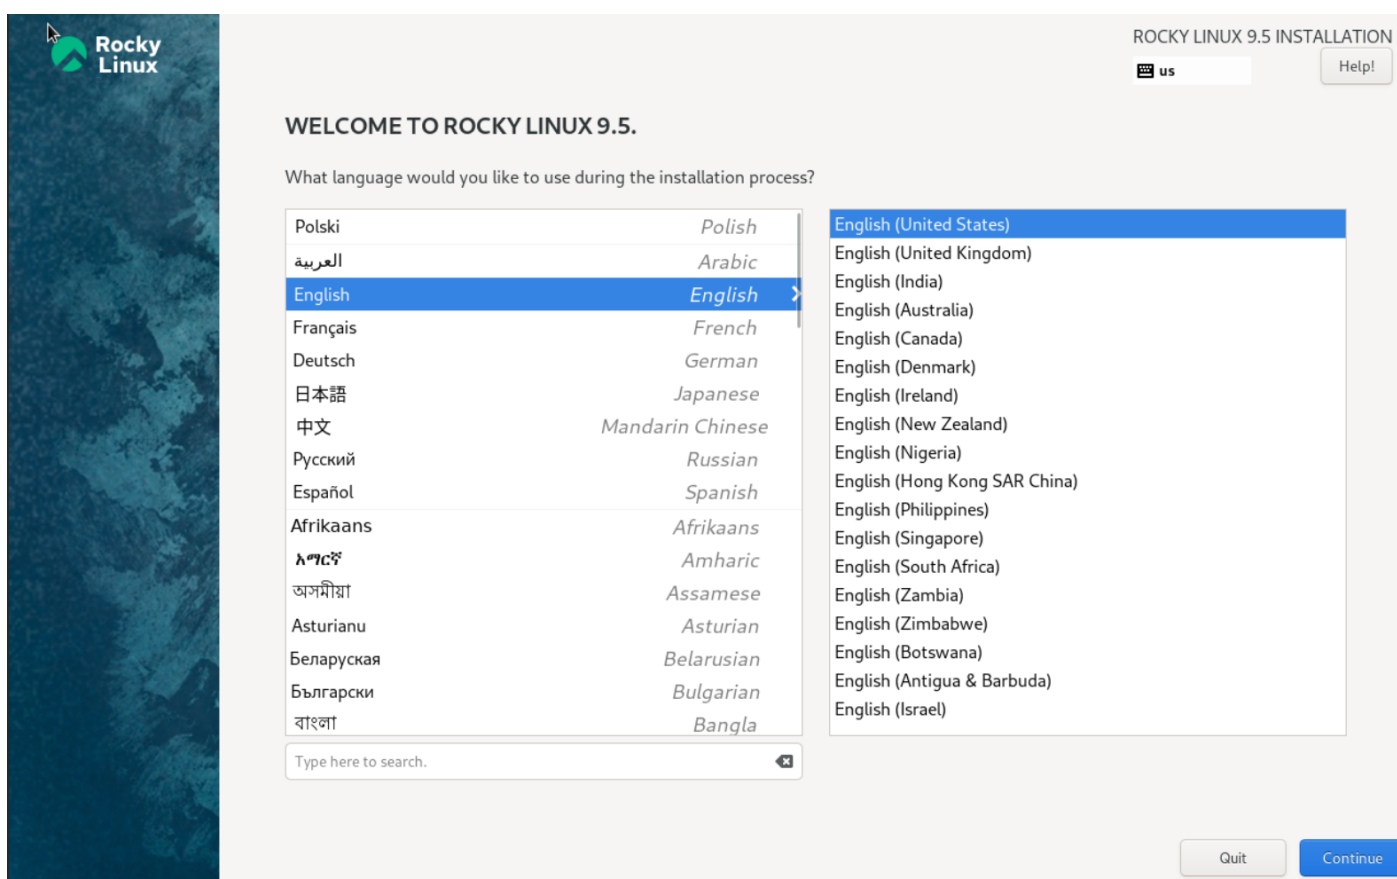

I wciskamy kombinację klawiszy

CTRL + ALT + F3

Przeniesie nas to do sesji terminalowej w której będziemy mogli dowolnie zarządzać dyskami. Możemy zweryfikować wykrywane dyski poprzez List Block Devices:

lsblk

```
Rocky Linux 9.5 (Blue Onyx)
Kernel 5.14.0-503.14.1.el9_5.x86_64 on an x86_64
```

```
[anaconda root@localhost /]# lsblk
NAME MAJ:MIN RM  SIZE RO TYPE MOUNTPOINTS
loop0  7:0      0 848.7M  1 loop /run/rootfsbase
sda     8:0      0   10G   0 disk
sdb     8:16     0   15G   0 disk
sdc     8:32     0    4G   0 disk
sdd     8:48     0   32G   0 disk
sr0     11:0     1   1.8G   0 rom   /run/install/sources/mount-0000-cdrom
                                /run/install/repo
zram0  252:0    0    3.8G   0 disk [SWAP]
[anaconda root@localhost /]# _
```

Na początku musimy utworzyć physical device poprzez komendę pvcreate

```
pvcreate /dev/sdX
```

Przykład wykonania komendy

```
pvcreate /dev/sda
```

```
[anaconda root@localhost /]# pvcreate /dev/sda
Physical volume "/dev/sda" successfully created.
Creating devices file /etc/lvm/devices/system.devices
```

Tworzymy resztę wymaganych urządzeń fizycznych:

```
[anaconda root@localhost /]# pvcreate /dev/sdb
Physical volume "/dev/sdb" successfully created.
[anaconda root@localhost /]# pvcreate /dev/sdc
Physical volume "/dev/sdc" successfully created.
[anaconda root@localhost /]# pvcreate /dev/sdd
Physical volume "/dev/sdd" successfully created.
[anaconda root@localhost /]# _
```

Revision #1

Created 1 April 2025 09:55:59 by Tomasz Konieczny

Updated 1 April 2025 10:46:28 by Tomasz Konieczny